


series 107-10 - inserter - extractor

Calmark offers the Series 107-10 Card Inserter-Extractor as a reduced size variation of the standard Series 107 for cards with limited available space.

Weight: .100 oz (2.84g)
Mechanical Advantage: 3.3 : 1

This part is otherwise same as standard series 107.



TABULATION

Part No.	"W" Dim.	Card Thickness
107-10	.290 (7.37)	1/16" (1.6)
107-10-3	.350 (8.89)	3/32" (2.4) or 1/8" (3.2)

To obtain with Pre-Started Assembly Pin add prefix "P" to part number.

series 108 - inserter - extractor

Calmark offers the Series 108 Card Inserter-Extractor for efficient insertion and extraction of PC cards in high density connector-contact and multiple connector applications.

FEATURES:

- **Lever action provides mechanical advantage for efficient insertion and extraction of card.**
- **Compatible with other competitive configurations.**
- **Strong glass filled nylon material.**
- **Available in colors for coding.**
- **Generous area for hot stamp marking.**

MATERIALS

Inserter - Extractor: Glass Filled (30%) 6/6 or 6 Nylon.
Meets UL 94V-0.
Self extinguishing to flame.
May be used at 250°F continuously
Resistant to alkalis, weak acids,
and common solvents.

Roll Pins: Stainless Steel, 1/8" (3.17) dia. x 1/4" (6.4) long.
Furnished with each inserter-extractor.
(To obtain pin Pre-Started add prefix "P" to part no.)


Weight: .133oz (3.77g)

COLOR: Standard color is black.
Additional colors available on request.
When ordering colors other than black,
please specify the color you wish.


HOT STAMPING: Hot stamp marking can be furnished to your requirements.

APPLICATION DATA: Two inserter-extractors are recommended per card.
Fits 1/16" (1.6) thick cards only.
Mechanical advantage: 4.5:1

TOLERANCES: .xxx = +/- .010, .xx = +/- .020
(.xx = +/- 0.25, .x = +/- 0.5)

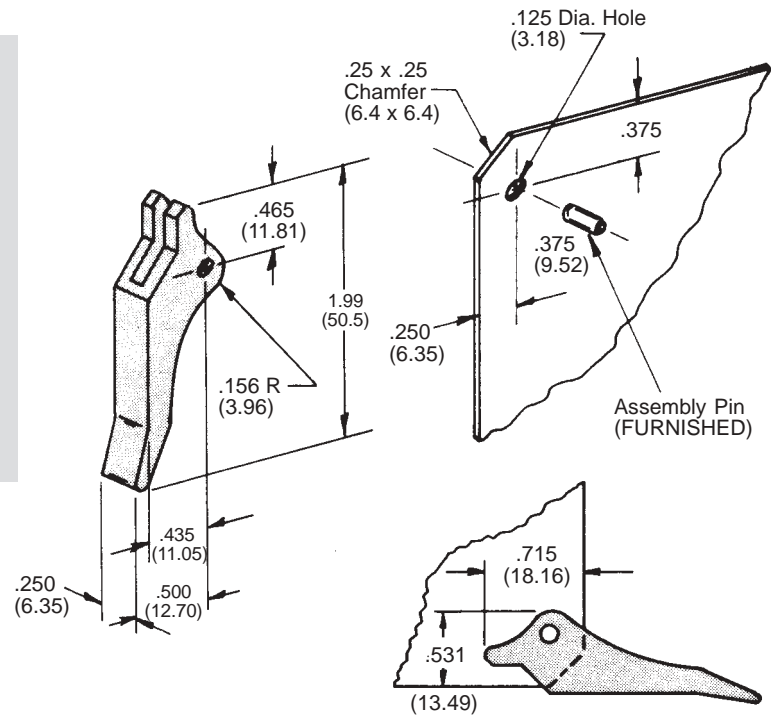

Card Clearance required when rotated.

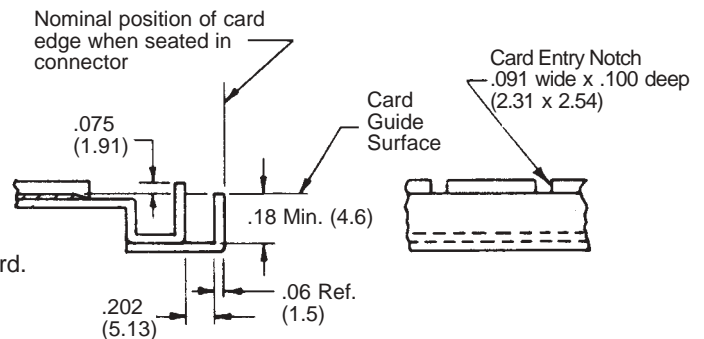

DETAIL OF ACTUATING SURFACES
Required on top and bottom guide plates of Calmark fabricated card cages.