series 115-287 - nylon guide

CALMARK® CORPORATION 4915 Walnut Grove Ave., San Gabriel, CA 91776 (626) 287-0451 FAX (626) 287-7350
E-mail: sales@calmark.com www.calmark.com

Calmark offers the Series 115-287 Card Guide, a most unique design in PC card guides. The Series 115-287 Card Guide allows users of louver or lance type card guides to easily change to an insulated nylon card guide with a minimum modification of strength and air flow.

FEATURES:

- ***Availiable for 1/16" (1.6) and 3/32"(2.4) thick cards.***
- ***Unique snap-on design.***
- ***Secure and easy installation.***
- ***Wide lead-in for easy card entry.***
- ***No mounting hardware required.***
- ***Metal web support provides strength and rigidity.***
- ***Narrow profile for excellent airflow.***
- ***No mounting holes required.***
- ***Economical.***

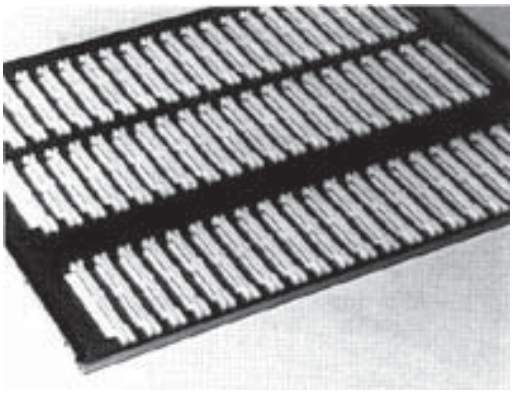

MATERIAL: Nylon 6/6 or 6.
Meets UL 94V-2.
Self extinguishing to flame.
May be used at 250°F continuously.
Resistant to alkalies, week acids, and common solvents.

WEIGHT: .053oz (1.85g)

COLOR: Standard color is natural (white). Additonal colors available on request. When ordering colors other than white, please specify the particular color you wish.

PATENT NO. 3,878,438

TABULATION

Part No.	"A" Dim.
115-287	.076 (1.93)
115-287-3	.106 (2.69)

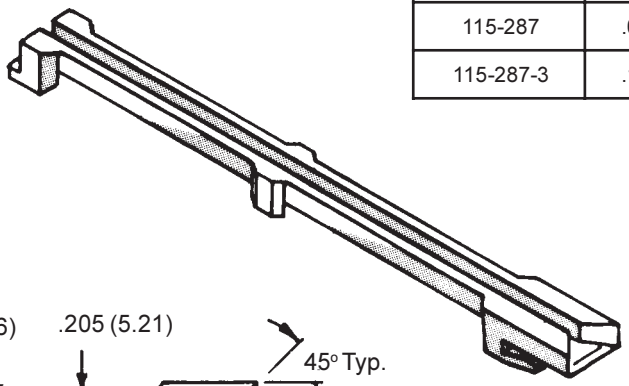

TOLERANCES: .xxx =+/-.010, .xx = +/- .02 (.xx=+/- 0.25) (.x=+/-0.5)

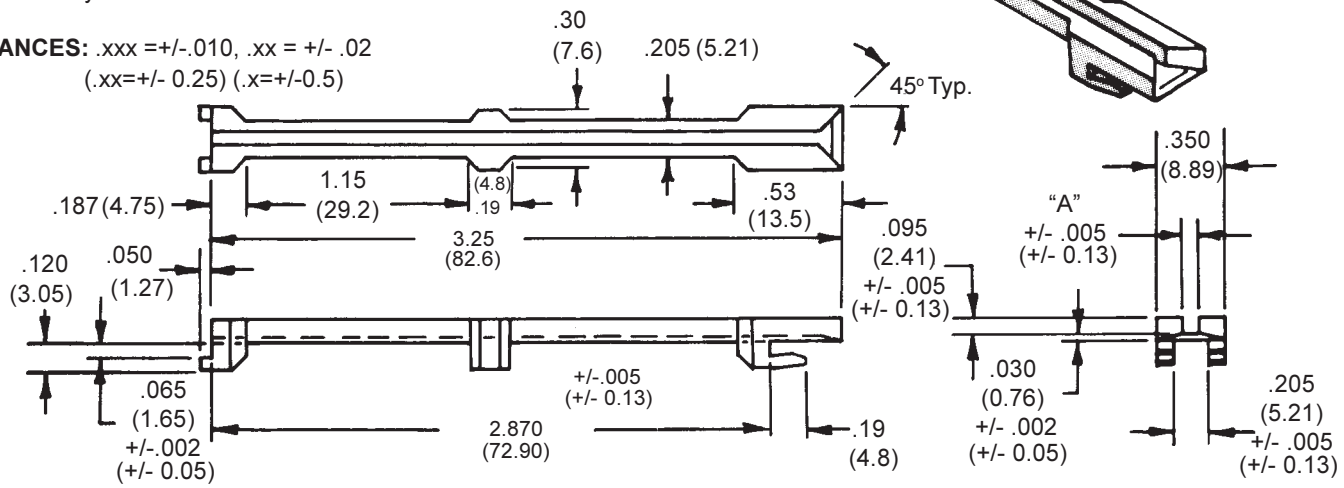

INSTALLATION DATA:

1. Slip front end of guide on first.
2. Bow guide and tuck back end under.

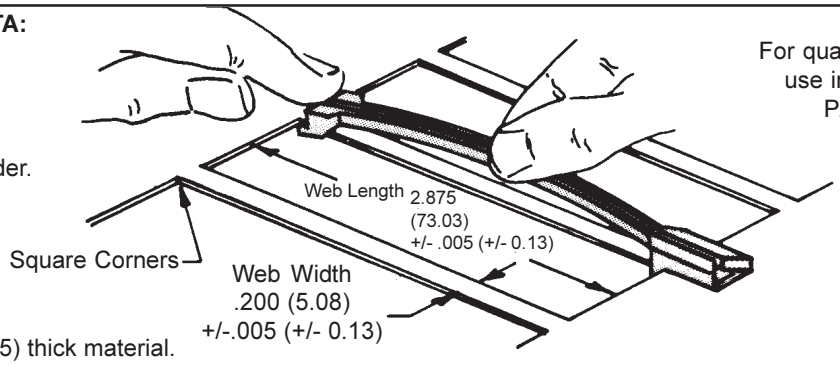

Fits up to .065 (1.65) thick material.
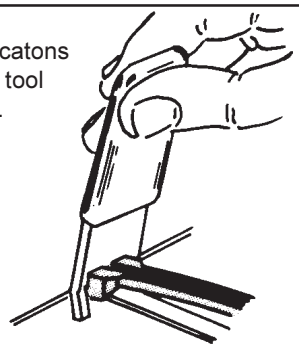
For quantity applicatons use installation tool P/N 115T-1.